




REGOMS PRODUCT DATASHEET

1"- 1/2" Wilden Pump

1" – 1/2" Wilden Pump

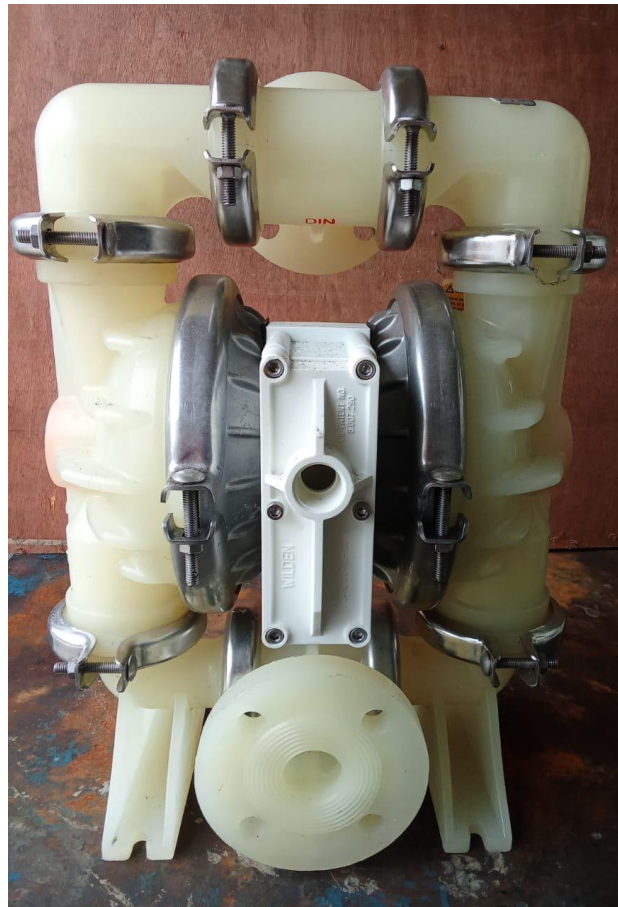

FOR ILLUSTRATION PURPOSES ONLY

The **1" to 1/2" Wilden Pump** is an air-operated double-diaphragm (AODD) pump designed for reliable and efficient fluid transfer in various industrial applications. Its non-metallic construction makes it ideal for handling corrosive and abrasive fluids, offering superior chemical resistance.

SPECIFICATION	DESCRIPTION
<p>MAIN FEATURES</p>	<ul style="list-style-type: none"> ❖ Maximum Flow Rate: 354 lpm (94 gpm) ❖ Ship Weight: Polypropylene 16.8 kg (37 lb) ❖ PVDF 21.3 kg (47 lb) ❖ PTFE PFA 23.9 kg (52 lb) ❖ Air Inlet: 13 mm (1/2") ❖ Liquid Inlet: 38 mm (1-1/2") ❖ Liquid Outlet: 38 mm (1-1/2")
<p>SAFETY FEATURES</p>	<ul style="list-style-type: none"> ❖ Leak-Free Operation ❖ Corrosion-Resistant Materials ❖ ATEX Certification ❖ Overpressure Protection ❖ Self-Priming & Dry-Run Capability ❖ Non-Electrical Operation ❖ Compatible with various diaphragm materials ❖ Flexible Mounting Options

For a quotation and detailed pricing, please contact our sales team:

REGOMS Engineering (M) Sdn. Bhd.

No. 10-1, Jalan 13/48A, The Boulevard
Shop Office Sentul Raya, Sentul Selatan,
51000 KL. WP.

Malaysia

Tel: +603 2858 2600

Email: sales1@regoms.com

REGOMS Australia Pty Ltd.

Level 1, 16, McDougall Street,
PO Box 1279, MILTON QLD 4064

Australia

M: +614 0008 4977

F: +617 3198 2401

E: sri@regoms.com

<https://www.regoms.com>

Any modification of the content, duplication or reprinting of this datasheet, as well as any distribution to third parties - even in parts - shall require the express written approval of REGOMS.